

DATA SHEET

SV 200/2


SIDE CHANNEL BLOWERS

double stage

air-cooled

MAKE IT BECKER.



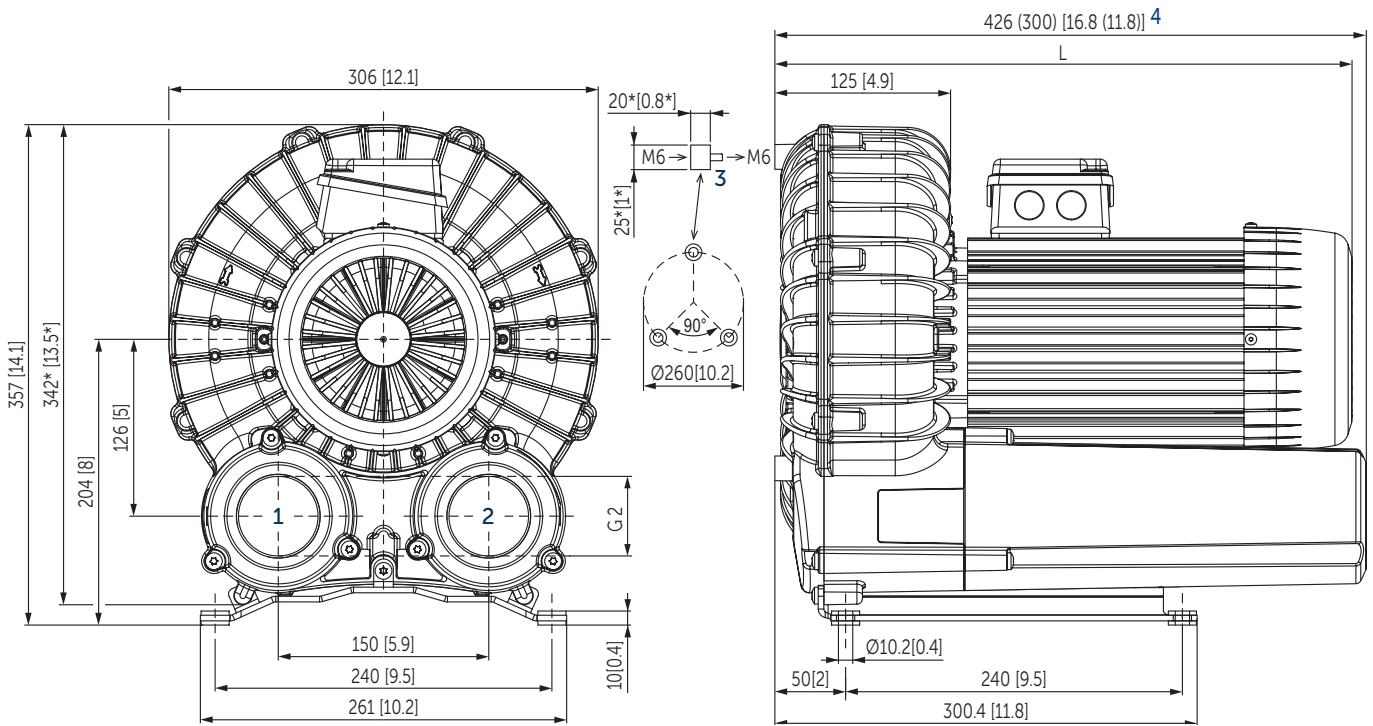

- 1 Vacuum connection (G2)
- 2 Pressure connection (G2)
- 3 Optional vibration dampers (rubber buffer) for vertical installation
- 4 Optional with shorter silencers
- * Device dimensions without pedestal under the silencer, with rubber buffers on the enclosure cover
- The motor illustration may vary
- Dimensions in mm [inch]




Blast air rate		Pressure relative		Motors		Emission sound pressure level ¹⁾		Weight with motor
m³/h		mbar		kW		dB(A)		kg
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
90	110	+300	+260	1.1	1.29/1.3	64.5 (+275 mbar)	67.6 (300 mbar)	25.5
90	110	+410	+430	1.5	1.8	64.5 (+275 mbar)	67.6 (300 mbar)	28.5

¹⁾ According to DIN EN ISO 11203, accuracy class of measurement: class 2, extended measurement uncertainty: 3 dB
1 m [39.4 inch] distance, at medium load, both connection sides piped

3~ Motors												L
#	50 Hz					60 Hz				Version		mm
	kW	V	rpm	A		kW	V	rpm	A			[inch]
01	1.1	Δ230/Y400	IE3	2870	4.3/2.5	1.29	Δ265/Y460	IE3	3460	4.3/2.5	UL • CSA	391
							Δ230/Y400		3395	4.7/2.7	IP55 • ISO F • bimetal	[15.4]
02						1.3	YY230/Y460	IE3	3465	4.8/2.4	UL • CSA • CC	427
							YY208/Y –	–	3430	5.05/ –	IP55 • ISO F • bimetal	[16.8]
03	1.1	Δ200/Y350	IE3	2875	5.0/2.9	1.29	Δ220/Y380–400	IE3	3462	5.0/2.9–3.0		391
							Δ200/Y350		3405	5.2/3.0	IP55 • ISO F • bimetal	[15.4]
04	1.5	Δ230/Y400	IE3	2897	5.6/3.25	1.8	Δ265/Y460	IE3	3487	5.6/3.25	UL • CSA • CC	431
							Δ230/Y400		3449	6.0/3.45	IP55 • ISO F • bimetal	[17.0]
05						1.8	YY230/Y460	IE3	3490	6.9/3.45	UL • CSA • CC	427
							YY208/Y –		3470	6.85/ –	IP55 • ISO F • bimetal	[16.8]
06	1.5	Δ200/Y350	IE3	2905	7.4/4.3	1.8	Δ220/Y380–400	IE3	3480	7.2/4.3–4.2		431
							Δ200/Y350		3450	7.2/4.2	IP55 • ISO F • bimetal	[17.0]

1~ Motors												L
#	50 Hz				60 Hz				Version			mm [inch]
	kW	V	rpm	A	kW	V	rpm	A				
01	1.1	230 ±10%	2855	6.7	1.3	230 ±10%	3375	7.9	UL • CSA IP55 • ISO F • bimetal			391 [15.4]
02	1.5	230 ±10%	2860	8.9	1.8	230 ±10%	3350	11.0	UL • CSA IP55 • ISO F • bimetal			431 [17.0]


• Type plate data on current consumption and rotation speed of the motors may vary. Tolerance -1.5/+2% in each case.

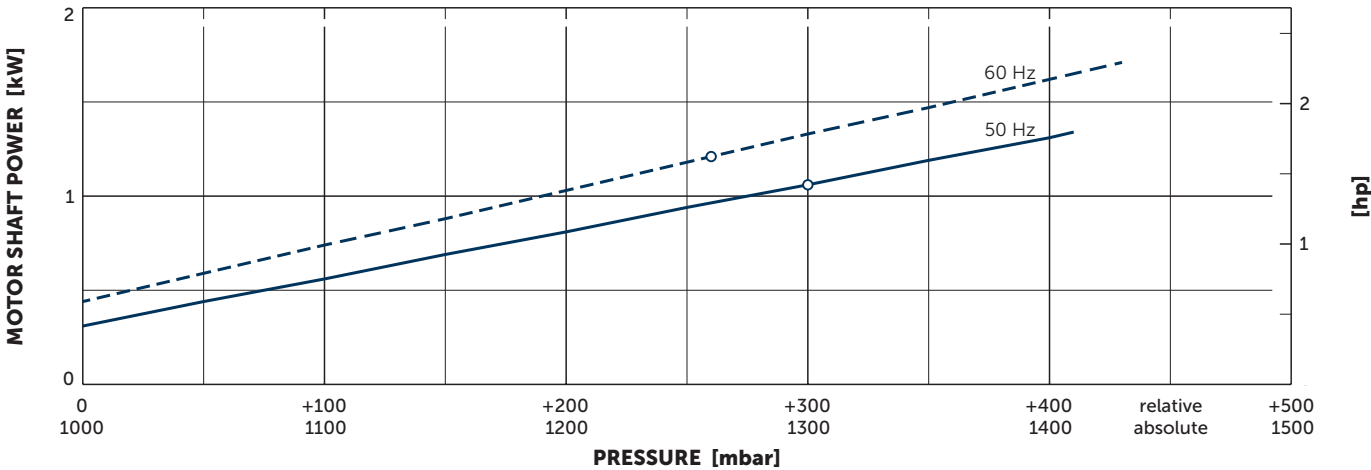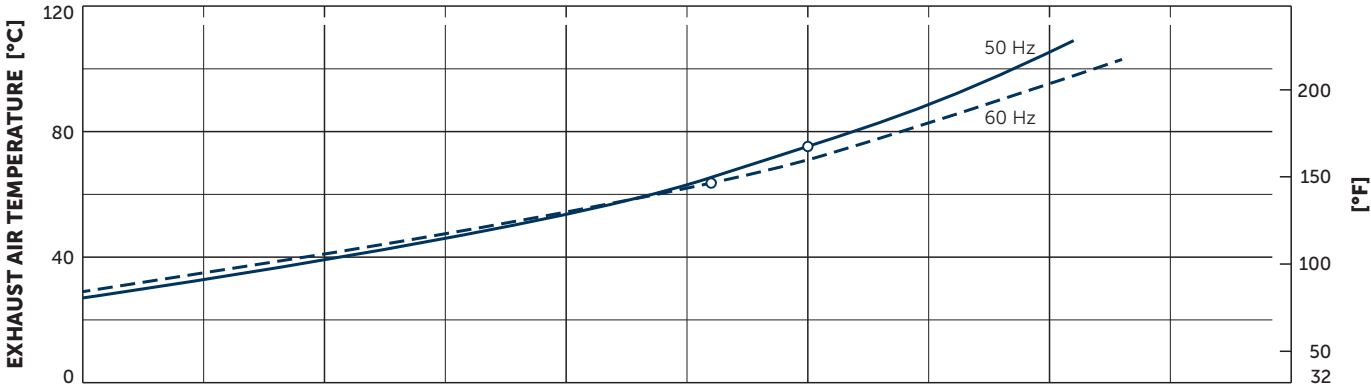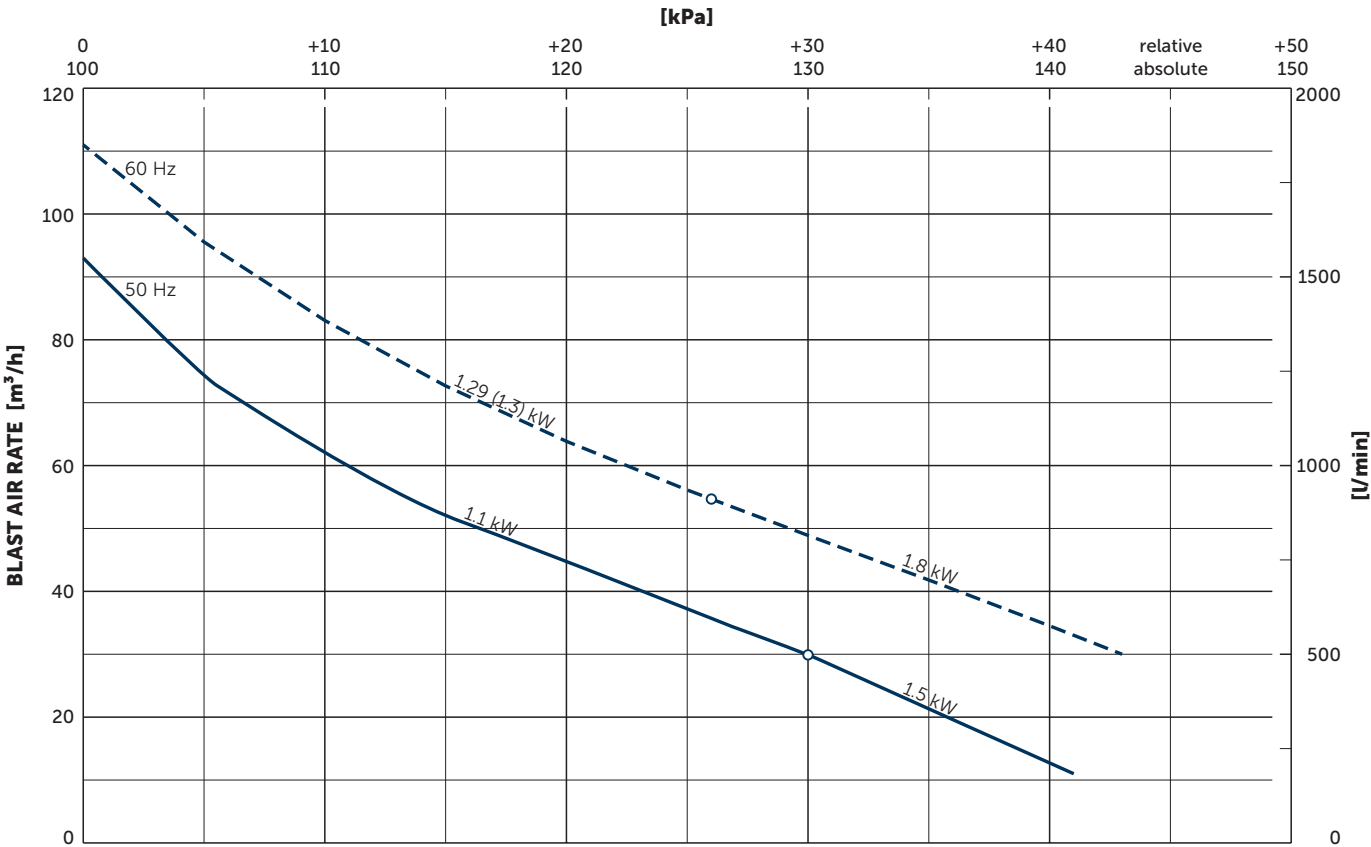

Reference data (atmosphere): 1000 mbar (100 kPa), 20°C (68°F)
Tolerance: ±10%
Temperature: Inlet air 0°C ... 40°C (32°F ... 104°F), Ambient air 3~ -10°C ... 40°C (14°F ... 104°F), Ambient air 1~ 15°C ... 40°C (59°F ... 104°F)


+ VARIANTS AND ACCESSORIES

PRESSURE SAFETY VALVE

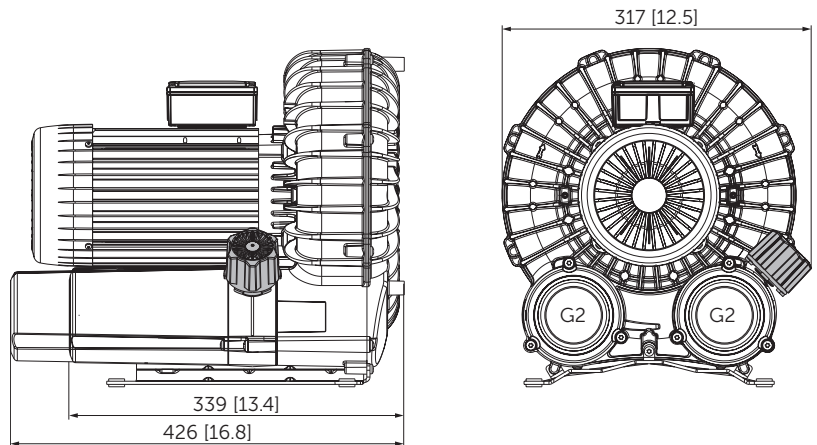


SUCTION FILTER

- Paper or polyester insert

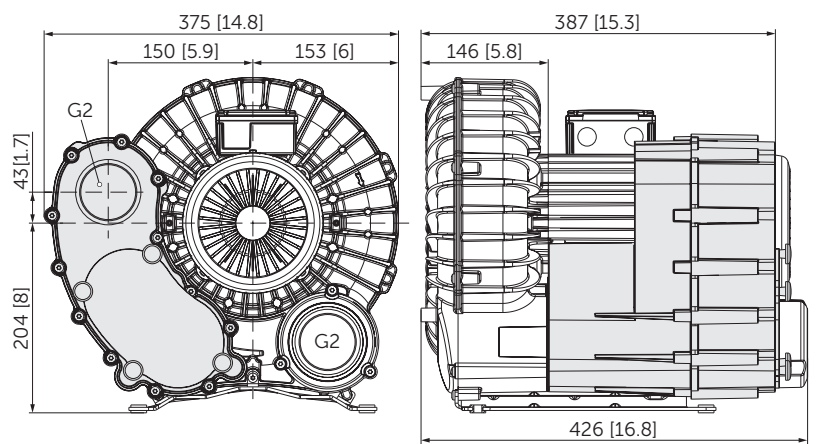

SUCTION FILTER AND PRESSURE SAFETY VALVE

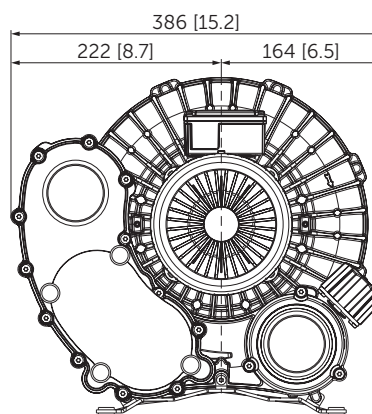

OTHER VARIANTS AND ACCESSORIES

- Without pedestal under the silencers, with rubber buffers on the enclosure cover
- Vacuum/pressure connection G1½ instead G2
- Short or long silencers
- Increased corrosion protection
- External suction filter
- Sound proof box SH 18¹⁾



Sound proof box SH 18

¹⁾ See separate data sheet

- Dimensions in mm [inch] – For other dimensions, see the figure on page 2.
- Possible combinations on request



MAKE IT BECKER.