

DATA SHEET

VATP 1600

RADIAL BLOWERS

air-cooled
with VARIAIR frequency inverter

MAKE IT BECKER.

LARGE VOLUME FLOW
with a compact design

INTEGRATED FREQUENCY INVERTER

with a wide control range up to a maximum of
400 Hz for exact adaptation to customer demands


INTAKE FILTER
with large filter surface

SOUND-INSULATED CABINET



VARIAIR
TURBO PACKAGE


 **BECKER**

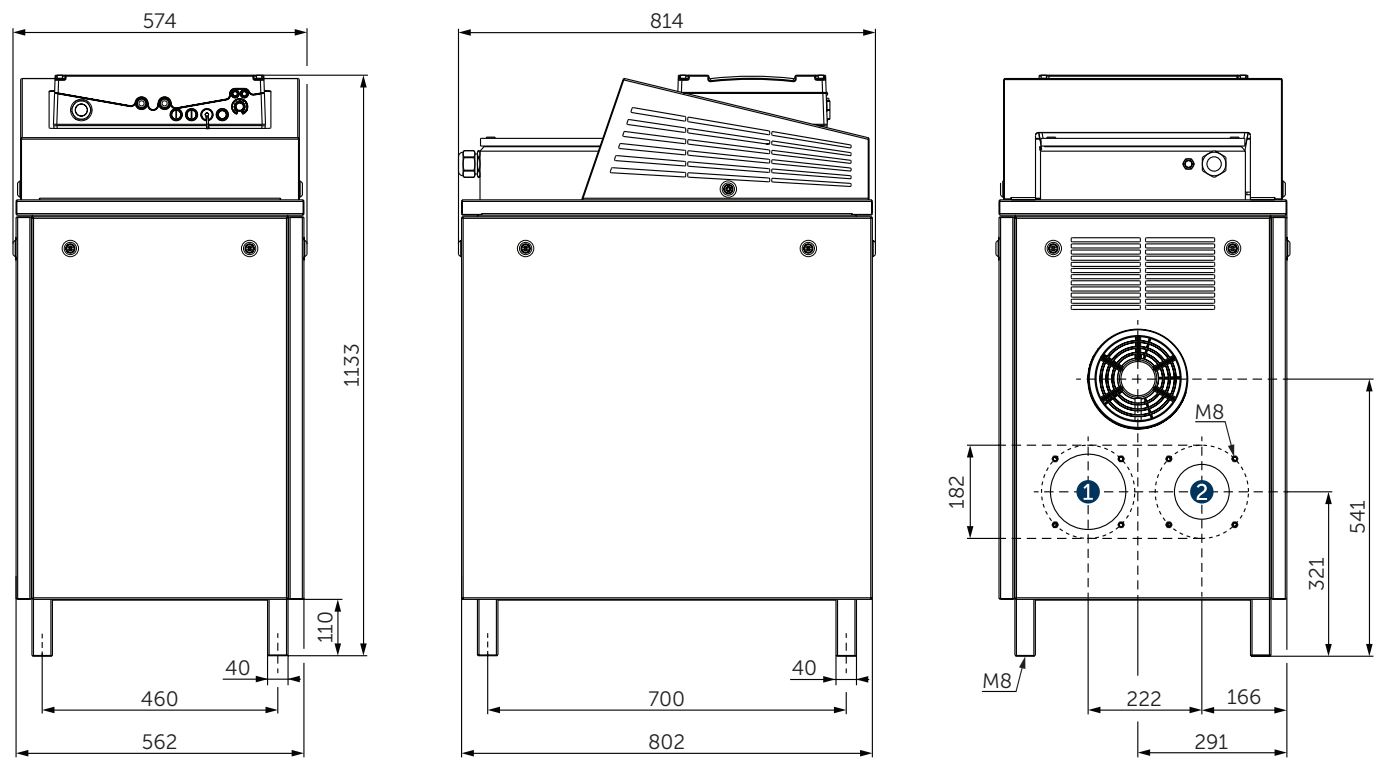

- 1 Vacuum connection
- 2 Pressure connection
- Dimensions in mm [inch]

Blast air rate	Pressure relative	Frequency	Emission sound pressure level ¹⁾	Weight	 Frequency inverter
m³/h max.	mbar max.	Hz	dB(A) @ -200 mbar (360 Hz)	kg	
1570	+410	≤400	65	162	400–480 V ±10% 50/60 Hz

¹⁾ DIN EN ISO 3744 (KpA = 3 dB(A)) interval of 1 m, at medium load, both connection sides piped

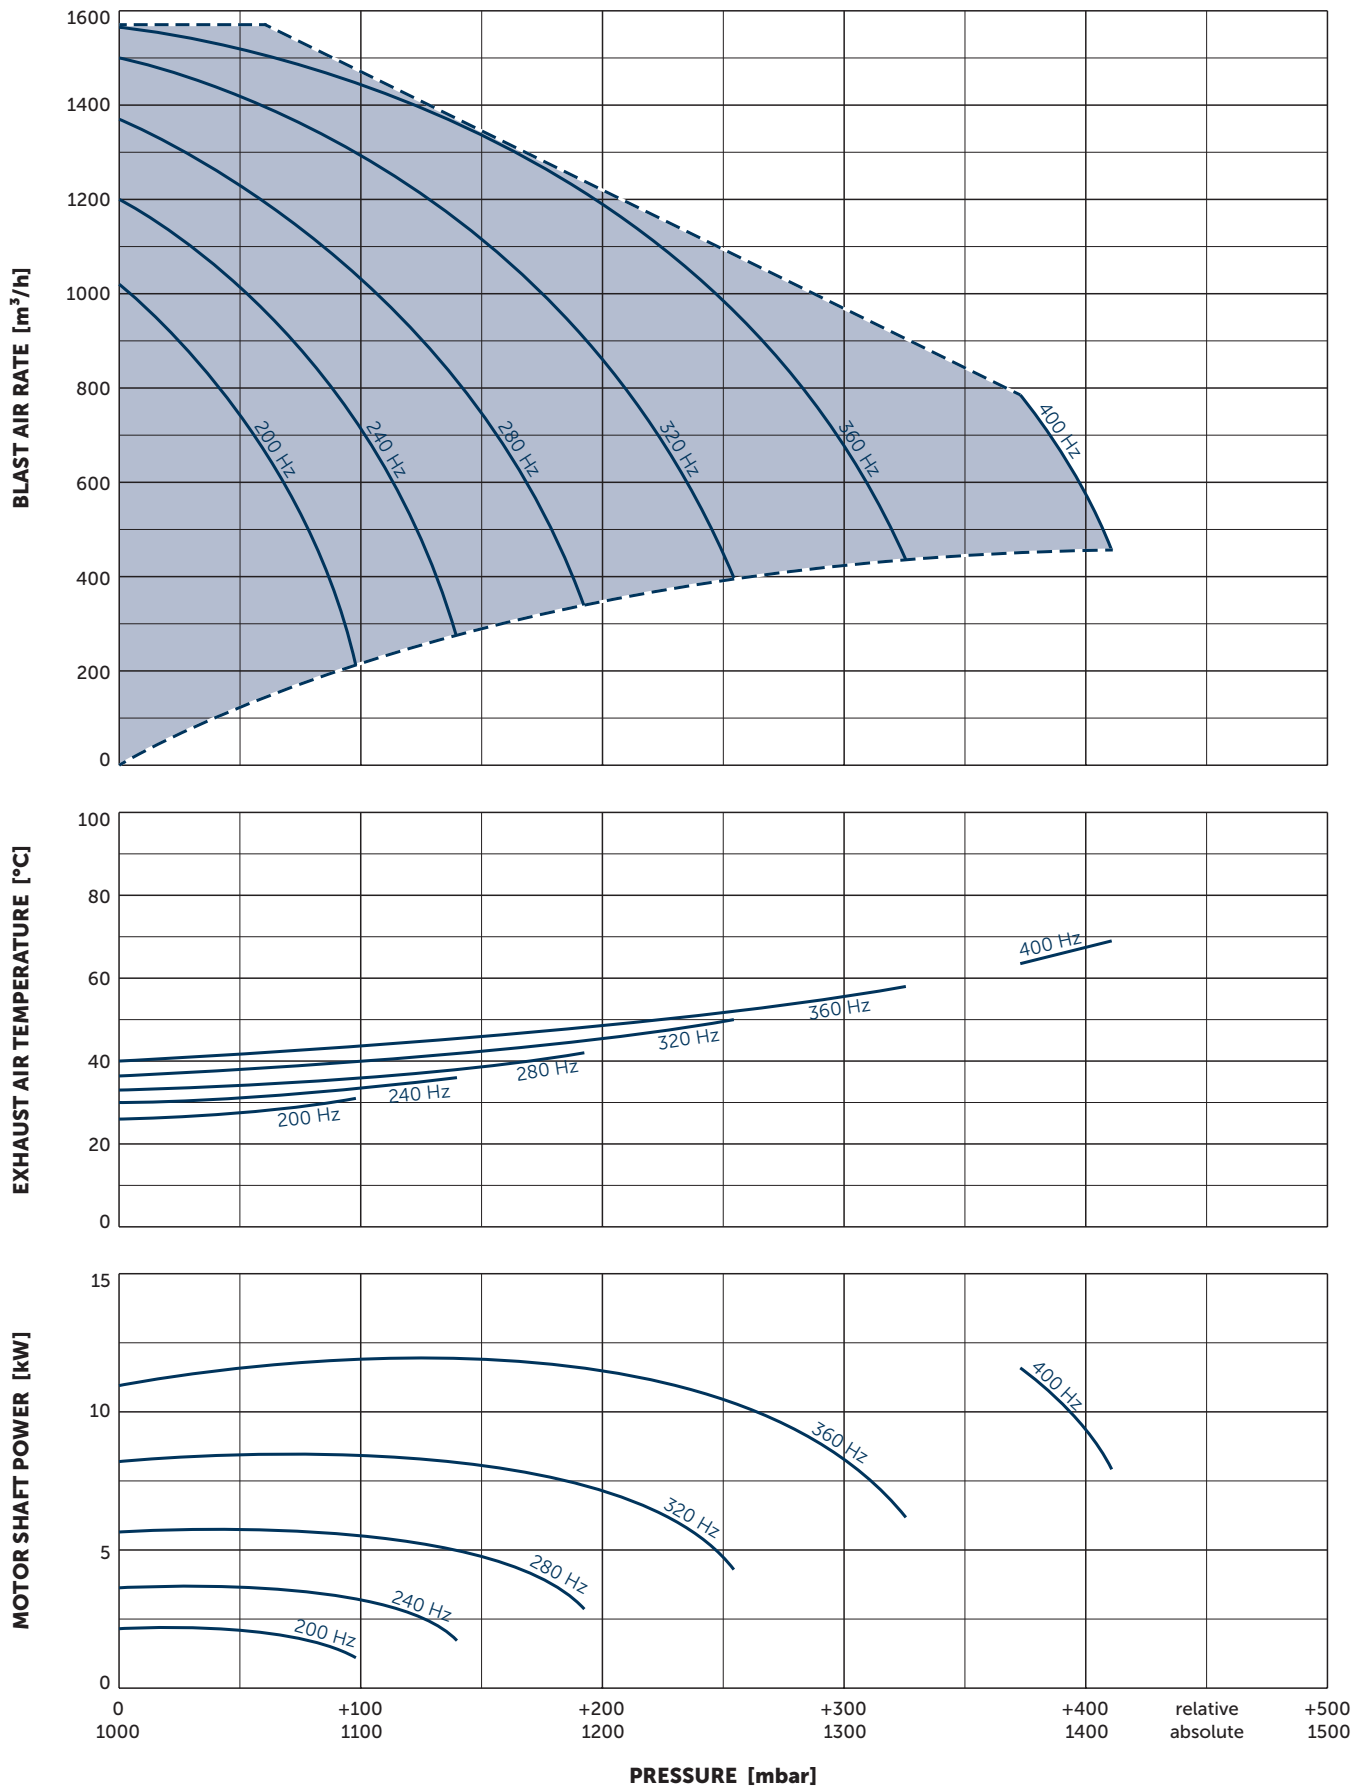

Reference data (atmosphere): 1000 mbar, 20°C
 Tolerance: ±5%

VARIANTS AND ACCESSORIES

- **Non-return flap** for suction side and/or pressure side
- **Silencers** for suction side and/or pressure side
- **Hose connector** for suction side and/or pressure side, gasket and 4 screws included in each case
 - **RV2.19-0-110.12** (51660252500) for 110 mm hose
 - **RV2.19-0-110.10** (51660152500) for 150 mm hose



Suction and pressure connection prepared for optional hose connectors RV2.19-0-110.xx



Optional silencers

MAKE IT BECKER.

HOMEPAGE
RV/VATP SERIES



ONLINE SHOP
VATP 1600

