

DATA SHEET

SV 5.90/2


SIDE CHANNEL VACUUM PUMPS

double stage

air-cooled

MAKE IT BECKER.



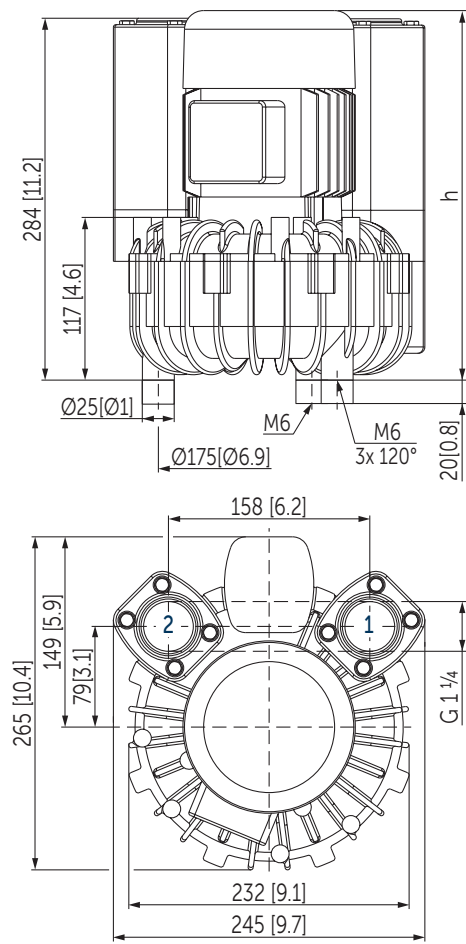

- 1 Vacuum connection (G1¼)
- 2 Pressure connection (G1¼)
- Including rubber buffers
- Options: external safety valve, external suction filter, pedestal, increased corrosion protection
- The motor illustration may vary
- Dimensions in mm [inch]

Suction air rate		Vacuum relative		Emission sound pressure level ¹⁾		Weight incl. motor ²⁾
m³/h		mbar		dB(A)		kg
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
43	50	-230	-240	62	64	≈13.0




3~ Motors										h
#	50 Hz				60 Hz				Version	mm [inch]
	kW	V	rpm	A	kW	V	rpm	A		
01	0.37	Δ230/Y400	IE2 2810	1.65/0.95	0.44	Δ265/Y460 Δ230/Y400 Δ208	3400 3300 3100	1.60/0.92 1.82/1.05 1.90	IP55 • ISO F • bimetal	291 [11.5]
02	0.37	310–460/ 180–265	2700	1.2/2.1	0.44	370–530/ 215–310	3200	1.2/2.1	IP55 • ISO F	286 [11.3]

1~ Motor										h
#	50 Hz				60 Hz				Version	mm [inch]
	kW	V	rpm	A	kW	V	rpm	A		
01	0.37	220–240	2830	3.0/3.6	0.44	220–240	3420	3.0/3.6	IP55 • ISO F	286 [11.3]

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 1 m [39.4 inch] distance, at medium load, both connection sides piped

²⁾ Depending on the motor

▪ Type plate data on current consumption and rotation speed of the motors may vary. Tolerance -1.5/+2% in each case.

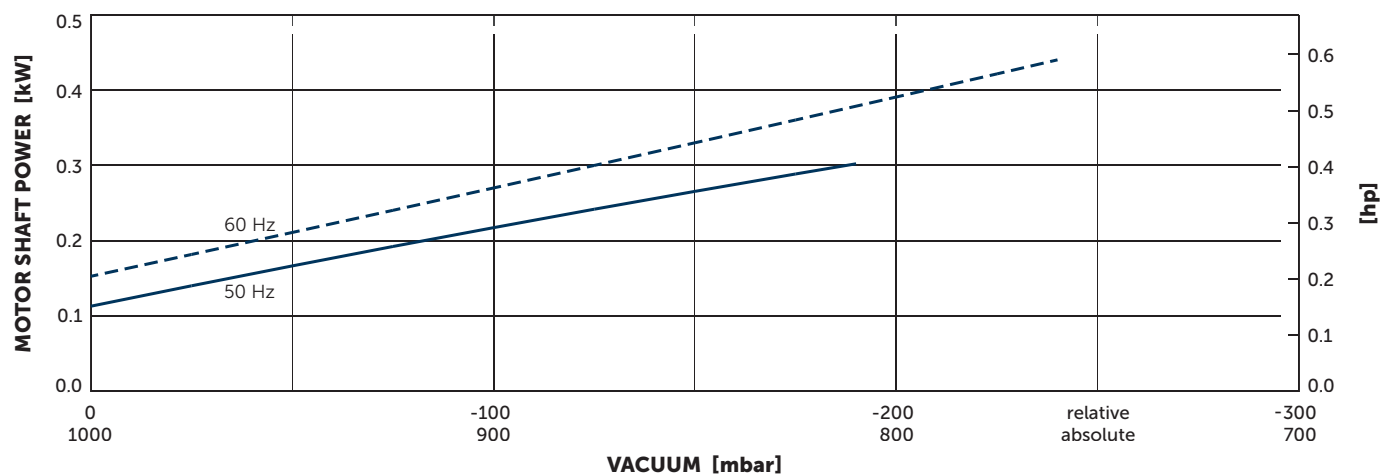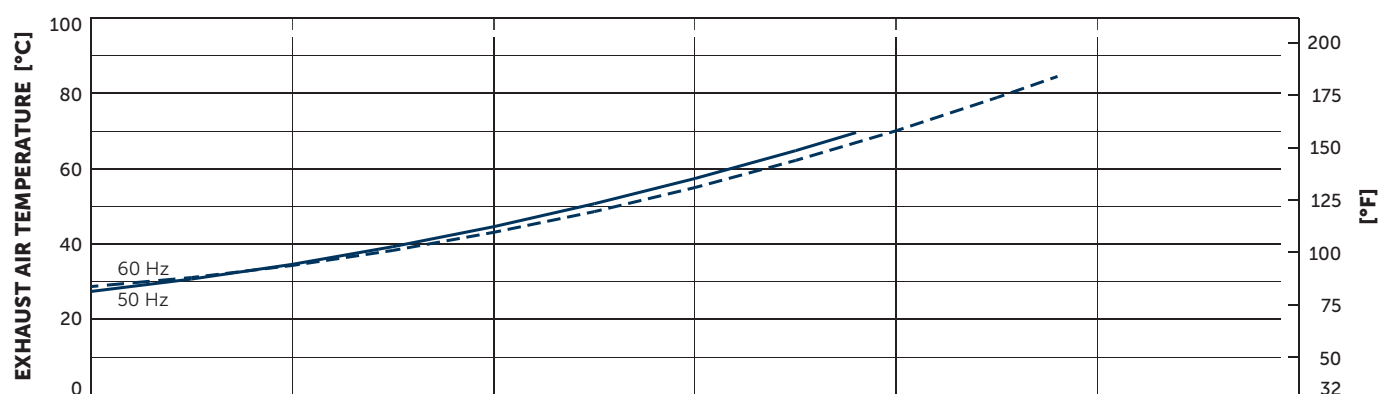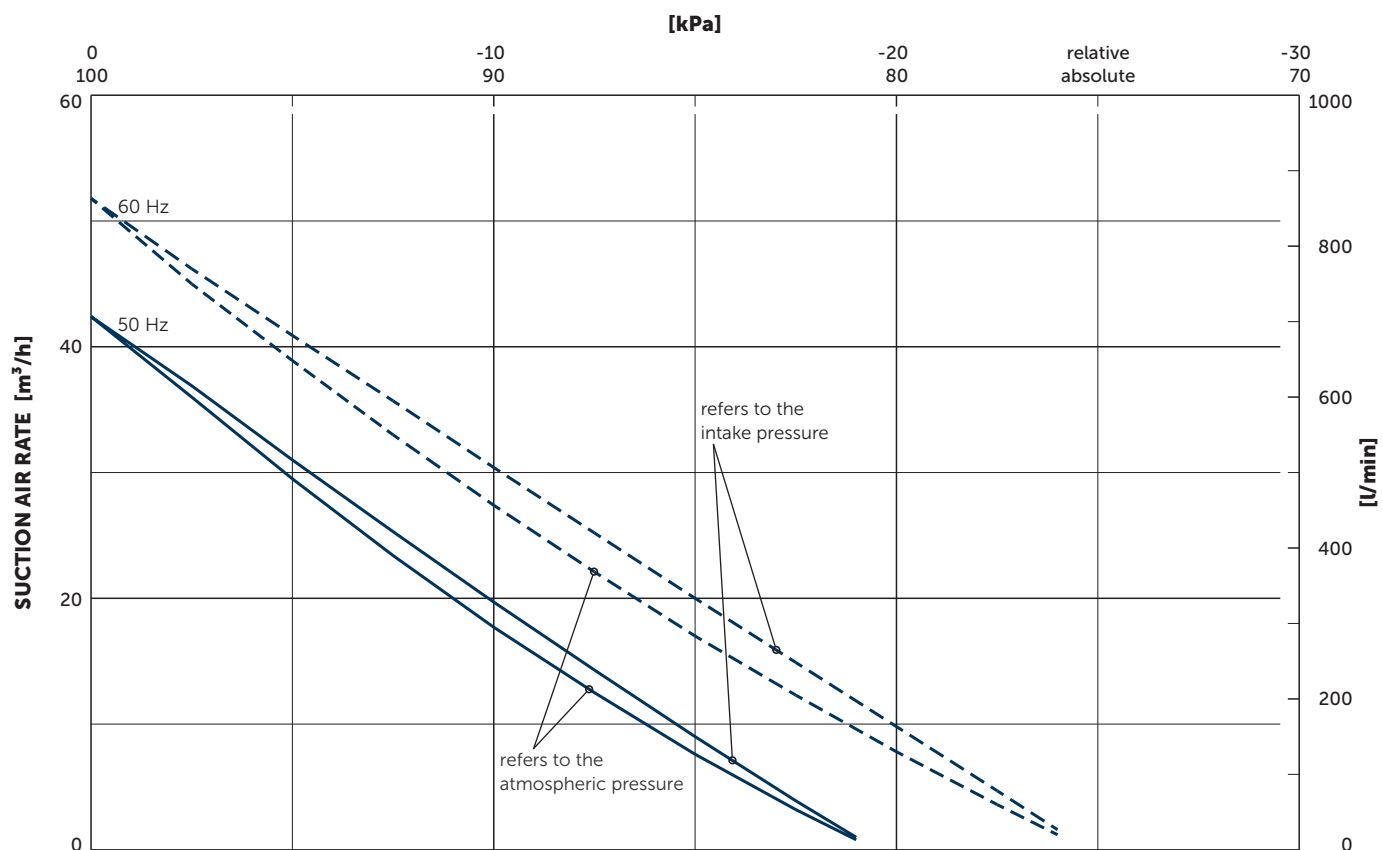

Reference data (atmosphere): 1000 mbar (100 kPa), 20°C (68°F)

Tolerance: $\pm 10\%$

Temperature: Inlet air 0°C ... 40°C (32°F ... 104°F), Ambient air 3~ -10°C ... 40°C (14°F ... 104°F), Ambient air 1~ 15°C ... 40°C (59°F ... 104°F)



MAKE IT BECKER.